


**△ SPECIFICATION**


Insulator:PBT

**△ Contact:Phosphor Bronze**  
Gold Flash Over All,Over Nickel


RoHS Compliant

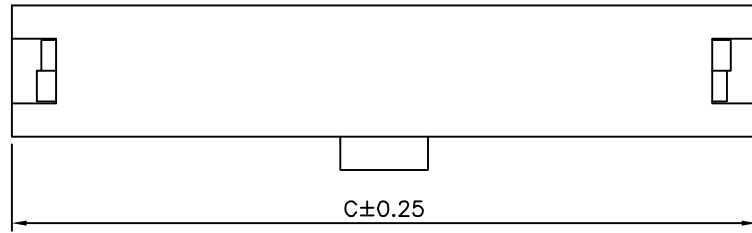

△

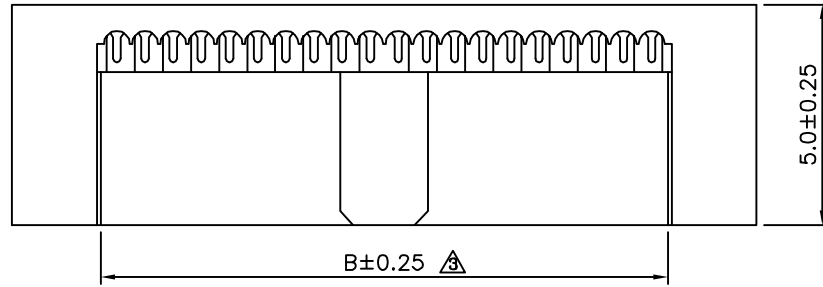


△



△

△ Pin	A	B	C
6	2.54	4.01	8.04
8	3.81	5.28	9.31
10	5.08	6.55	10.58
12	6.35	7.82	11.85
14	7.62	9.09	13.12
16	8.89	10.36	14.39
20	11.43	12.90	16.93
24	13.97	15.44	19.47
26	15.24	16.71	20.74
30	17.78	19.25	23.28
34	20.32	21.79	25.82
40	24.13	25.60	29.63
44	26.67	28.14	32.17
50	30.48	31.95	35.98
60	36.83	38.30	42.33
64	39.37	40.84	44.87
66	40.64	42.11	46.14
68	41.91	43.38	47.41

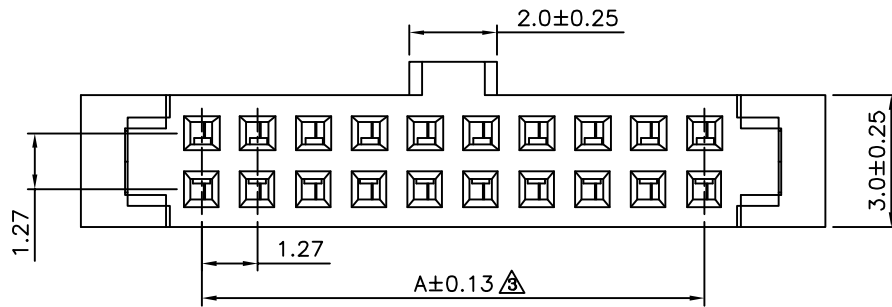

△

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

02291

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

SCALE NONE

REV.

A4

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
ANG

UNIT mm



△ A4

Modify Data

HZF

11/15/2011

△ A3

Modify Data

HZF

11/29/2008

△ A2

Modify Data

HZF

11/09/2007

△ A1

Modify Data

BECKY

2005/01/04

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE